

Fabric-Over-Foam EMI Shielding Gaskets

773GT


Description

Laird Fabric-over-Foam (FoF) 773GT provides excellent EMI shielding performance for customers where EMI issues occur. The 773GT EMI gaskets are composed of electrically conductive fabric wrapped around a soft urethane foam core. They are supplied with a conductive pressure sensitive adhesive (PSA). The 773GT EMI gaskets are halogen free products that can be created with cross-section profiles such as rectangle, D shape, and others. The gaskets can be further customized to an application by die-cutting, hole punching, notching, etc.

Features and Benefits

- Fabric-over-Foam gaskets are RoHS compliant
- Halogen-free per IEC-61249-2-21 standard
- Abrasion resistant metalized fabric shows virtually no degradation in shielding performance after 300,000 cycles (ASTM D3886)
- Urethane foam core provides low compression set ensuring long-term reliable gasket performance
- Service temperatures from -40°F to 158°F (-40°C to 70°C)

Composition of Product

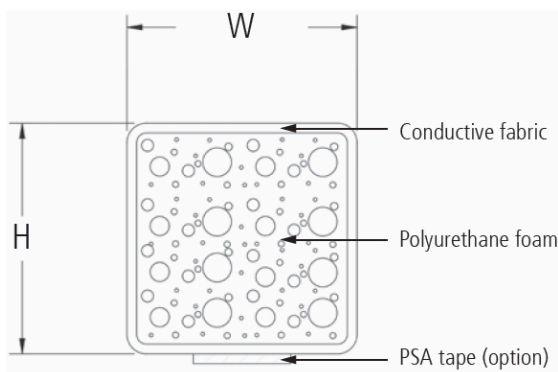

773GT Typical Properties

Properties	Unit	Value	Test Method
Shielding Effectiveness [^]			MIL STD 83528C
@100MHz	dB	102	
@ 1GHz		104	
Z-axis Resistance @25% compression	Ohm	<0.03	-
Compression Set	%	<20	ASTM D3574
Operation Temp.	°C	-40 ~ 70	-
Shelf Life		12 months @23°C / 60% R.H.	

* Above data were based on dimension of 10mm(W)x 8mm(H).

[^]: Typical value

Foam: Polyurethane Foam

Properties	Unit	Value
Color		Charcoal
Density	Kg/m ³	50±5
Tensile Strength	kPa	>120
Elongation	%	>110
Hardness [^]	kgf	28

[^]:Typical value

Fabric: Conductive Fabric(3035-773)

Properties	Unit	Value
Physical Properties		
Fabric substrate		Polyester
Metals		Ni / Cu
Color		Gray
Electrical Properties		
Surface Resistivity (fabric side)	Ω/□	<0.05

NOTICE: Although the information and recommendations set forth herein (hereinafter "information") are presented in good faith and believed to be correct as of the date hereof, Laird Technologies® makes no representation or warranties as to the completeness or accuracy thereof. Information is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will Laird Technologies be responsible for damages of any nature whatsoever resulting from the use or reliance upon information or the product to which information refers. Nothing contained herein is to be construed as a recommendation to use any product, process, equipment or formulation in conflict with any patent, and Laird Technologies makes no representation or warranty, expressed or implied, that the use thereof will not infringe any patent. The data set forth in all tables, charts, graphs and figures herein are based on samples tested and are not guaranteed for all samples or applications. Such data are intended as guides and do not reflect product specifications for any particular product. NO REPRESENTATION OR WARRANTIES, EITHER EXPRESSED OR IMPLIED, OR MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OF ANY OTHER NATURE ARE MADE HEREUNDER WITH RESPECT TO INFORMATION OR THE PRODUCT TO WHICH INFORMATION REFERS.